

# STANDARD VALUES FOR ROOF PITCHES

## ROOF FINSH IN ONE SHEET LENGTH

### Indication

The values given below are valid for roofs under 600 metres sea level. For higher locations, we recommend a pitch of at least 10%.

When using transparent sheets, it is advisable to always seal the longitudinal overlaps.




	SP 30	SP 35	SP 40	SP 41	SP 42	SP 44S	SP 45	SP 59	SP 80
• <b>Fitting without sealing strips</b> Minimum value	8%	6%	6%	6%	6%	6%	6%	6%	6%
• <b>Fitting with sealing strips</b> Minimum value	6%	5%	5%	5%	5%	5%	5%	5%	5%

## ROOF FINSH WITH BUTT JOINT OVERLAPPING

### Indication

The values given below are valid for roofs under 600 metres sea level. For higher locations, we recommend a pitch of at least 10%.

The butt overlaps for transparent sheets must always be sealed.

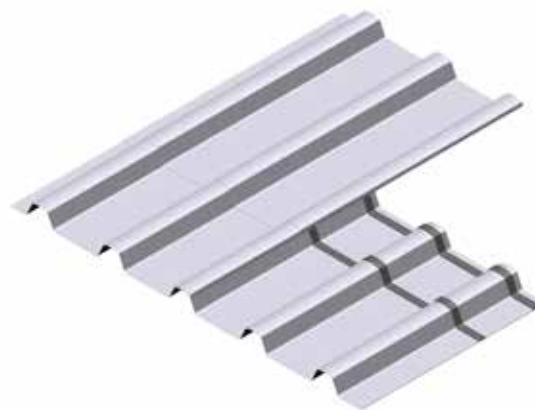

	SP 30	SP 35	SP 40	SP 41	SP 42	SP 44S	SP 45	SP 59	SP 80
• <b>Fitting without sealing strips, overlap min. 30 cm</b> Minimum value	10%	10%	10%	10%	10%	10%	10%	10%	10%
• <b>Fitting with sealing strips, overlap min. 20 cm</b> Minimum value	6%	6%	6%	6%	6%	6%	6%	6%	6%